


ROMANCE PORCELAIN TILE



ROMANCE PORCELAIN TILE

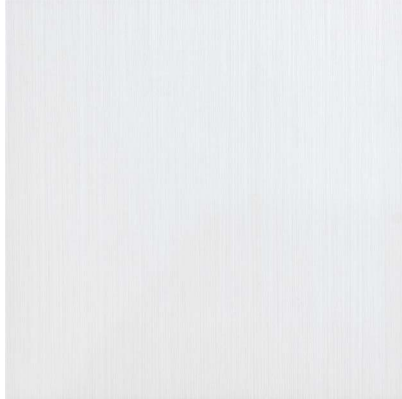


13" x 13" ROMANCE WHITE PORCELAIN TILE
63-224




1" x 3" ROMANCE WHITE MOSAICS
63-232



3" x 13" ROMANCE WHITE BULLNOSE
63-225

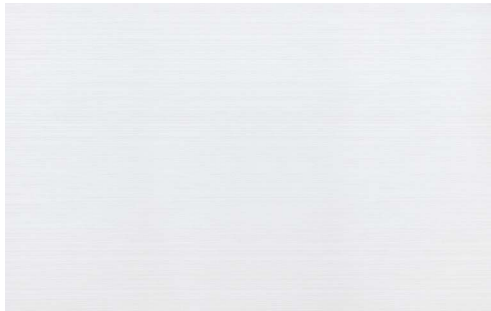

10" x 16" ROMANCE WHITE WALL TILE
56-020



3" x 10" ROMANCE WHITE BULLNOSE
56-021



4" x 16" ROMANCE WHITE LISTELLO
56-022

ROMANCE PORCELAIN TILE



13" x 13" ROMANCE CREAM PORCELAIN TILE
63-226



1" x 3" ROMANCE CREAM MOSAICS
63-233



3" x 13" ROMANCE CREAM BULLNOSE
63-227



10" x 16" ROMANCE CREAM WALL TILE
56-023




3" x 10" ROMANCE CREAM BULLNOSE
56-024




4" x 16" ROMANCE CREAM LISTELLO
56-025

ROMANCE PORCELAIN TILE

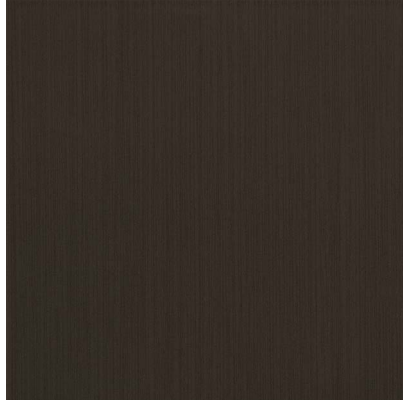

13" x 13" ROMANCE MINK PORCELAIN TILE
63-228

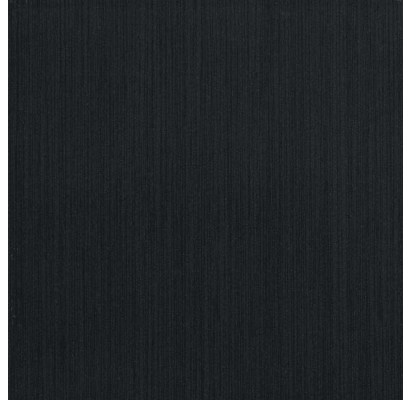


13" x 13" ROMANCE BLACK PORCELAIN TILE
63-230




3" x 13" ROMANCE MINK BULLNOSE
63-229



3" x 13" ROMANCE BLACK BULLNOSE
63-231

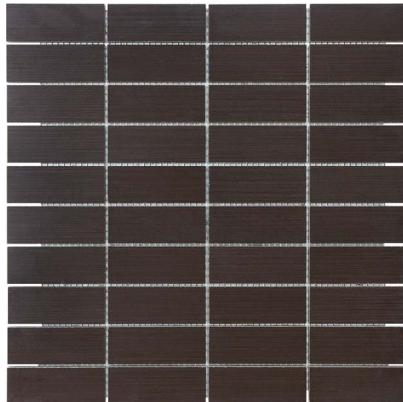

1" x 3" ROMANCE MINK MOSAICS
63-234

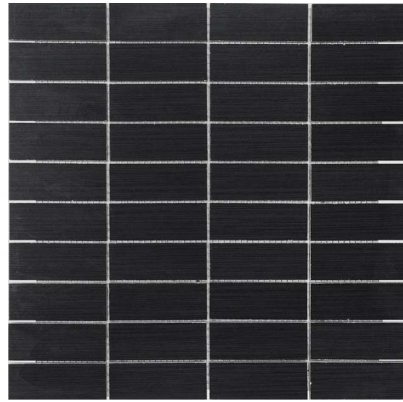

1" x 3" ROMANCE BLACK MOSAICS
63-235

ROMANCE PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE				LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
	WHITE	CREAM	MINK	BLACK					
13" x 13" ROMANCE PORCELAIN TILE	63-224	63-226	63-228	63-230	53.21	13	15.28	46	702.88
10" x 16" ROMANCE WALL TILE	56-020	56-023	n/a	n/a	41.68	14	15.06	54	813.45
4" x 16" ROMANCE LISTELLO	56-022	56-025	n/a	n/a	19.74	15	n/a	48	720 pcs.
1" x 3" ROMANCE MOSAICS	63-232	63-233	63-234	63-234	38.62	10	11.74	48	563.52
3" x 13" ROMANCE BULLNOSE	63-225	63-227	63-229	63-231	20.04	30	n/a	60	1800 pcs.
3" x 10" ROMANCE BULLNOSE	56-021	56-024	n/a	n/a	11.78	20	n/a	144	2880 pcs.

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	13" x 13"
THICKNESS		mm – in	7.8 mm – 5/16"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	3 - 4*
SCRATCH HARDNESS		(Mohs)	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Res.
FROST RESISTANCE	EN ISO 10545-12		Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.80
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.80
DCOF (WET)	ANSI B101.3		≥ 0.50
SHADE VARIATION			V1

* Additional abrasion resistance (pei) information.