

MAYFAIR HD PORCELAIN TILE



MAYFAIR HD PORCELAIN TILE



12" x 24" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN

MAYFAIR HD PORCELAIN TILE



24" x 48" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN
POLISHED BFP2448MPS



16" x 32" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN
POLISHED BFP1632MPS, MATTE BFP1632MMS



10.5" x 32" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN
POLISHED BFP1032MPS



12" x 24" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN
POLISHED BFP1224MPS, MATTE BFP1224MMS




24" x 24" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN
POLISHED BFP2424MPS, MATTE BFP2424MMS




3" x 12" MAYFAIR STATUARIO VENATO
HD PORCELAIN BULLNOSE
POLISHED BFP312BNMPS
MATTE BFP312BNMMS



4" x 12" MAYFAIR STATUARIO VENATO
HD RECT. PORCELAIN
POLISHED BFP412MPS



2" x 2" MAYFAIR STATUARIO VENATO
HD BASKETWEAVE PORCELAIN MOS.
POLISHED BFP22MPS
MATTE BFP22MMS



1.25" x 1.25" MAYFAIR STATUARIO
VENATO HD HEXAGON PORCELAIN
POLISHED BFP11MPS

MAYFAIR HD PORCELAIN TILE



12" x 24" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN

MAYFAIR HD PORCELAIN TILE



24" x 48" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN
POLISHED BFP2448MPC




16" x 32" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN
POLISHED BFP1632MPC, MATTE BFP1632MMC




10.5" x 32" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN
POLISHED BFP1032MPC



12" x 24" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN
POLISHED BFP1224MPC, MATTE BFP1224MMC

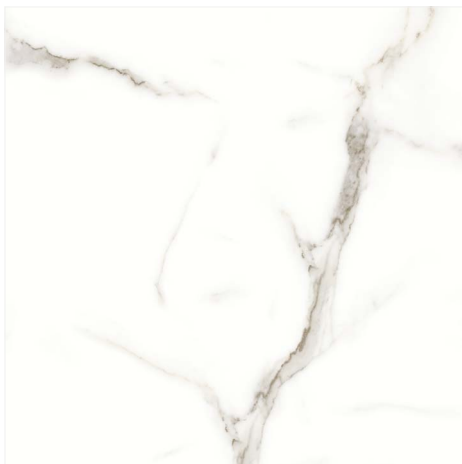


24" x 24" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN
POLISHED BFP2424MPC, MATTE BFP2424MMC



3" x 12" MAYFAIR CALACATTA ORO
HD PORCELAIN BULLNOSE
POLISHED BFP312BNMPC
MATTE BFP312BNMMC



4" x 12" MAYFAIR CALACATTA ORO
HD RECT. PORCELAIN
POLISHED BFP412MPC



2" x 2" MAYFAIR CALACATTA ORO
HD BASKETWEAVE PORCELAIN MOS.
POLISHED BFP22MPC
MATTE BFP22MMC



1.25" x 1.25" MAYFAIR CALACATTA
ORO HD HEXAGON PORCELAIN
POLISHED BFP11MHC

MAYFAIR HD PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
24" x 48" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN	92.16	2	15.50	32	496
24" x 24" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN	71.86 (avg.)	4	15.50	28	434
16" x 32" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN	74.21 (avg.)	4	13.78	38	523.64
12" x 24" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN	71.41 (avg.)	8	15.50	28	434
10.5" x 32" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN	62.48	6	13.78	39	537.42
4" x 12" MAYFAIR CALACATTA ORO HD RECTIFIED PORCELAIN	43.89	30	9.68	45	435.78
3" x 12" MAYFAIR CALACATTA ORO HD PORCELAIN BULLNOSE	22.00 (avg.)	20	n/a	84	1680 pcs.
2" x 2" MAYFAIR CALACATTA ORO HD BASKETWEAVE PORCELAIN MOS.	41.11 (avg.)	10	9.68	45	435.60
1.25" x 1.25" MAYFAIR CALACATTA ORO HD HEXAGON PORCELAIN MOS.	38.73	10	9.68	45	435.60
24" x 48" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN	92.16	2	15.50	32	496
24" x 24" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN	71.86 (avg.)	4	15.50	28	434
16" x 32" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN	74.21 (avg.)	4	13.78	38	523.64
12" x 24" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN	71.41 (avg.)	8	15.50	28	434
10.5" x 32" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN	62.48	6	13.78	39	537.42
3" x 12" MAYFAIR STATUARIO VENATO HD PORCELAIN BULLNOSE	22.00 (avg.)	20	n/a	84	1680 pcs.
4" x 12" MAYFAIR STATUARIO VENATO HD RECTIFIED PORCELAIN	43.89	30	9.68	45	435.78
2" x 2" MAYFAIR STATUARIO VENATO HD BASKETWEAVE PORCELAIN MOS.	41.39 (avg.)	10	9.68	45	435.60
1.25" x 1.25" MAYFAIR STATUARIO VENATO HD HEXAGON PORCELAIN MOS.	38.95	10	9.68	45	435.60

GENERAL SPECIFICATIONS – POLISHED

DESCRIPTION	METHOD	UNIT	4" x 12"	10.5" x 32"	12" x 24"	16" x 32"	24" x 24"	24" x 48"
THICKNESS		mm – in	9.8 mm – 3/8"	11.5 mm – 7/16"	9.8 mm – 3/8"	11.5 mm – 7/16"	9.8 mm – 3/8"	12.5 mm – 1/2"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4	4	4	4	4
SCRATCH HARDNESS		(Mohs)	5	5	5	5	5	5
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 500	≥ 500	≥ 500	≥ 500	≥ 500	≥ 500
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Res.	Class A – Res.	Class A – Res.	Class A – Res.	Class A – Res.	Class A – Res.
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant	Resistant	Resistant	Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.40	≥ 0.40	≥ 0.40	≥ 0.40	≥ 0.40	≥ 0.40
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60	≥ 0.60	≥ 0.60	≥ 0.60	≥ 0.60
DCOF (WET)	ANSI B101.3		< 0.42	< 0.42	< 0.42	< 0.42	< 0.42	< 0.42
SHADE VARIATION			V2	V2	V2	V2	V2	V2

GENERAL SPECIFICATIONS – MATTE

DESCRIPTION	METHOD	UNIT	12" x 24"	16" x 32"	24" x 24"
THICKNESS		mm – in	9.8 mm – 3/8"	11.5 mm – 7/16"	9.8 mm – 3/8"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4	4
SCRATCH HARDNESS		(Mohs)	6	6	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 450	≥ 450	≥ 450
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Res.	Class A – Res.	Class A – Res.
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.50	≥ 0.50	≥ 0.50
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.70	≥ 0.70	≥ 0.70
DCOF (WET)	ANSI B101.3		≥ 0.42	≥ 0.42	≥ 0.42
SHADE VARIATION			V2	V2	V2