



E S E D R A

fine porcelain stoneware

★★★★★  
**NAXOS**<sup>®</sup>  
FINCIBEC GROUP



# E S E D R A

- DELFI -

## 12X12 WALL/FLOOR | N1212ED



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 12X24 WALL/FLOOR | N1224ED



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 3X12 WALL/FLOOR | N312ED



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 2X2 MOSAIC | N22ED



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SHEET ONLY  
WEAR RATING: 5 | VARIATION: 3

## 3X12 BULLNOSE | N312EBND



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE PIECE ONLY  
WEAR RATING: 5 | VARIATION: 3



OUR **ESEDRA** LINE CAN BE FOUND IN  
THE **NAXOS** SECTION OF THE PRICE BOOK.



# ESEDRA

- EFESO -

## 12X12 WALL/FLOOR | N1212EE



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 12X24 WALL/FLOOR | N1224EE



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 3X12 WALL/FLOOR | N312EE



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 2X2 MOSAIC | N22EE



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SHEET ONLY  
WEAR RATING: 5 | VARIATION: 3

## 3X12 BULLNOSE | N312EBNE



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE PIECE ONLY  
WEAR RATING: 5 | VARIATION: 3



OUR ESEDRA LINE CAN BE FOUND IN  
THE NAXOS SECTION OF THE PRICE BOOK.



# ESEDRA

- OLIMPIA -

## 12X12 WALL/FLOOR | N1212EO



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 12X24 WALL/FLOOR | N1224EO



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 3X12 WALL/FLOOR | N312EO



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 2X2 MOSAIC | N22EO



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SHEET ONLY  
WEAR RATING: 5 | VARIATION: 3

## 3X12 BULLNOSE | N312EBNO



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE PIECE ONLY  
WEAR RATING: 5 | VARIATION: 3



OUR **ESEDRA** LINE CAN BE FOUND IN  
THE **NAXOS** SECTION OF THE PRICE BOOK.





# E S E D R A

- PERGAMO -

## 12X12 WALL/FLOOR | N1212EP



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 12X24 WALL/FLOOR | N1224EP



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 3X12 WALL/FLOOR | N312EP



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SQUARE FOOT ONLY  
(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN  
WEAR RATING: 5 | VARIATION: 3 | DCOF  $\geq$  0.42

## 2X2 MOSAIC | N22EP



PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE SHEET ONLY  
WEAR RATING: 5 | VARIATION: 3

## 3X12 BULLNOSE | N312EBNP






PORCELAIN GLAZED & FROST PROOF  
SOLD BY THE PIECE ONLY  
WEAR RATING: 5 | VARIATION: 3



OUR **ESEDRA** LINE CAN BE FOUND IN  
THE **NAXOS** SECTION OF THE PRICE BOOK.



# How to lay

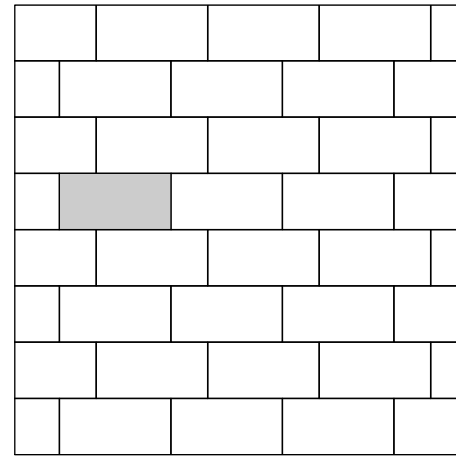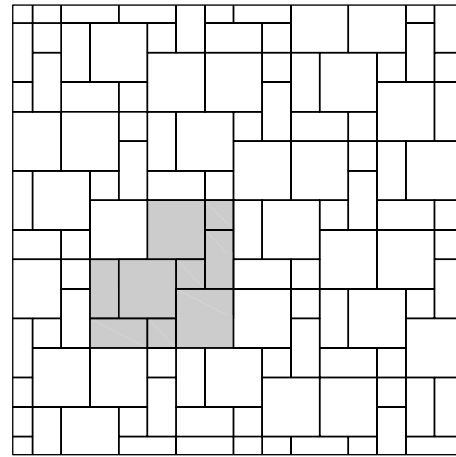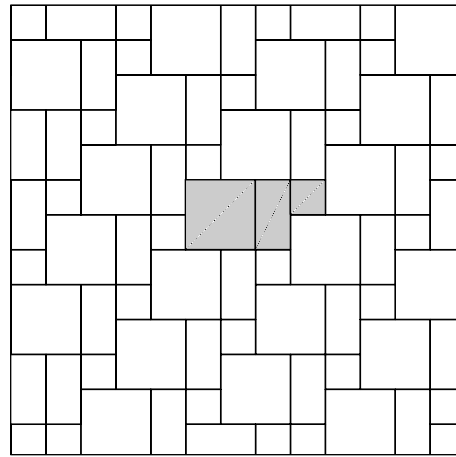


60x60	57,1%
30x60	28,6%
30x30	14,3%


60x60	57,1%
30x60	28,6%
30x30	14,3%

50x100	100%
--------	------


# Color variations




**V1**  
Even appearance



**V3**  
Medium variation



**V2**  
Light variation



**V4**  
Strong variation

It is necessary to take the tiles from several different boxes when laying them.

# Use categories



Floor tiles recommended for low traffic areas.



Floor tiles recommended for medium traffic areas.



Floor tiles recommended for light traffic areas.



Floor tiles recommended for heavy uses.



Floor tiles recommended for medium-light traffic areas.

# Packaging

	60x60 cm 24"x24"	50x100 cm 10"x39"	50x100 cm 20 mm 10"x39"	30x60 cm 12"x24"	30x30 12"x12"	30x30 cm Mosaico 12"x12" Mosaic	7,3x30 cm Mattoncino 3"x12"
Pc.	3	2	1	6	13	11	46
M <sup>2</sup>	1,08	1	0,5	1,08	1,17	1	1,007
Kg	23	21	22,5	22,50	24	20,3	20,5

	60x60 cm 24"x24"	50x100 cm 10"x39"	50x100 cm 20 mm 10"x39"	30x60 cm 12"x24"	30x30 12"x12"	30x30 cm Mosaico 12"x12" Mosaic	7,3x30 cm Mattoncino 3"x12"
Colli Boxes	40	35	42	48	36	50	60
M <sup>2</sup>	43,2	35	21	51,84	36	58,5	60,42
Kg	920	735	945	1080	730,8	1200	1230

# CARATTERISTICHE TECNICHE / GRES FINE PORCELLANATO

TECHNICAL SPECIFICATIONS / PORCELAIN STONWARE

STANDARDS : UNI EN 14411 ANNEX G - Bla / UNI EN ISO 13006 ANNEX G - Bla

CARATTERISTICHE TECNICHE TECHNICAL DATA TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ		TIPO DI PROVA STANDARD OF TEST NORME DU TEST TESTNORM TIPO DE PRUEBA ТИП ТЕСТА	VALORI PRESCRITTI DALLE NORME INTERNATIONAL STANDARDS INTERNATIONALE NORMWERTE VALEURS PREVUES PAR LES NORMES VALORES PREVISTOS POR LAS NORMAS ПРЕДЪОМОТЕННЫЕ СТАНДАРТОМ	VALORE MEDIO NAVOS NAVOS AVERAGE VALLE NAVOS MITTEL WERT VALEURS MOYEN NAVOS VALOR MEDIO NAVOS СРЕДНЕЕ ЗНАЧЕНИЕ NAVOS	
CARATTERISTICHE DIMENSIONALI - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN - DETERMINATION DES CARACTERISTIQUES DIMENSIONELLES CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ		REQUIREMENTS FOR NOMINAL SIZE		NAT	GRIP
		7 cm ≤ N < 15 cm		N ≥ 15 cm	
		mm		% mm	
LATI SIDES - SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН	FOR NON-RECTIFIED TILES	EN ISO 10545-2	±0,9	±0,6	±2,0
	FOR RECTIFIED TILES		±0,4	±0,3	±1,0
SPESORE THICKNESS - DICKE ÉPAISSEUR - ESPESOR ТОЛЩИНА		EN ISO 10545-2	±0,5	±5,0	±0,5
RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARETES - RECTITUD DE LOS CANTOS - КООРДИНАТНОСТЬ	FOR NON-RECTIFIED TILES	EN ISO 10545-2	±0,8	±0,5	±1,5
	FOR RECTIFIED TILES		±0,4	±0,3	±0,8
ORTOGONALITÀ RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITE - ORTOGONALIDAD КРЯВИЗНА СТОРОН	FOR NON-RECTIFIED TILES	EN ISO 10545-2	±0,8	±0,5	±2,0
	FOR RECTIFIED TILES		±0,4	±0,3	±1,5
PLANARITÀ SURFACE FLATNESS - EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEIDAD КРЯВИЗНА ПОВЕРХНОСТИ	CENTRE CURVATURE	FOR NON-RECTIFIED TILES	±0,8	±0,5	±2,0
		FOR RECTIFIED TILES	±0,6	±0,4	±1,8
	EDGE CURVATURE	FOR NON-RECTIFIED TILES	±0,8	±0,5	±2,0
		FOR RECTIFIED TILES	±0,6	±0,4	±1,8
	WARPAGE	FOR NON-RECTIFIED TILES	±0,8	±0,5	±2,0
	FOR RECTIFIED TILES		±0,6	±0,4	±1,8
ASSORBIMENTO D'ACQUA WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ		EN ISO 10545-3	≤ 0,5%		≤ 0,1%
RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE - BIEGESTÄNDIGKEIT RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ		EN ISO 10545-4	S ≥ 700 N f < 7,5 mm		CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME СООТВЕТСТВУЕТ
			S ≥ 1.300 N f > 7,5 mm		
			R ≥ 35 N/mm		
RESISTENZA ALL'URTO IMPACT RESISTANCE - STOSSESTÄNDIGKEIT RESISTANCE AUX CHOC - RESISTENCIA A LOS GOLPES УДАРНОСТОЙКОСТЬ		EN ISO 10545-5	VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ		> 0,80
COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATION THERMIQUE LINEAIRE - COEFFICIENT DE DILATACION TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСТЯЖЕНИЯ		EN ISO 10545-8	VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ		α = 6,7 x 10 <sup>-6</sup> / °C
RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOC THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ		EN ISO 10545-9	TEST SUPERATO SECONDO EN ISO 10545-1 TEST PASSED ACCORDING TO - TEST BESTANDEN NACH TEXTE DÉPASSÉ SELON - PRUEBA SUPERADA SEGÚN ИСПЫТАНИЕ ПРОЙДЕНО В СООТВЕТСТВИИ С		NESSUN DANNO NO DAMAGE - KEIN SCHADEN AUCUN DOMMAGE -NINGUN DAÑO БЕЗ ПОВРЕЖДЕНИЙ
DILATAZIONE ALL'UMIDITÀ (IN MMM) MOISTURE EXPANSION (IN MMM) - FEUCHTIGKEITSBEDINGTE AUSDEHNUNG (IN MMM) DILATACION A LA HUMIDIDAD (EN MMM) - DILATACION CON LA HUMEDAD (EN MMM) ВЛАЖНОСТНОЕ РАСТЯЖЕНИЕ (В MMM)		EN ISO 10545-10	VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ		MAX 0,1 mm / m
RESISTENZA AL GELO FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ		EN ISO 10545-12	TEST SUPERATO SECONDO EN ISO 10545-1 TEST PASSED ACCORDING TO - TEST BESTANDEN NACH TEXTE DÉPASSÉ SELON - PRUEBA SUPERADA SEGÚN ИСПЫТАНИЕ ПРОЙДЕНО В СООТВЕТСТВИИ С		NESSUN DANNO NO DAMAGE - KEIN SCHADEN AUCUN DOMMAGE -NINGUN DAÑO БЕЗ ПОВРЕЖДЕНИЙ
RESISTENZA AI PRODOTTI CHIMICI USO DOMESTICO E ADDITIVI PER PISCINA RESISTANCE TO HOUSEHOLD AND SWIMMING POOL CHEMICAL PRODUCTS - REBESTÄNDIGKEIT GEGEN HAUSHALTS-EMKALEN UND ZUSATZSTOFFE FÜR SWIMMINGPOOLS - RESISTANCE AUX PRODUITS CHIMIQUES USAGE DOMESTIQUE ET ADDITIFS POUR PISCINE - RESISTENCIA A LOS PRODUCTOS QUÍMICOS DE USO DOMÉSTICO Y ADITIVOS PARA PISCINA - СТОЙКОСТЬ К ДЕЙСТВИЮ ВЪШОДЬХИМИЧЕСКИХ СРЕДСТВ, ДОБАВКАМ В БАССЕЙНЫ		EN ISO 10545-13	B MIN		CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME СООТВЕТСТВУЕТ
RESISTENZA A BASSE CONCENTRAZIONI DI ACIDI E ALCALI RESISTANCE TO LOW CONCENTRATIONS OF ACIDS AND ALKALI - BESTÄNDIGKEIT BEI NIEDRIGEN KONZENTRATIONEN VON SÄUREN UND LAUGEN - RESISTENCIA A BAJAS CONCENTRACIONES D'ACIDES ET ALCALIS - RESISTENCIA A BAJAS CONCENTRACIONES DE ÁCIDOS Y ALCALIS - СТОЙКОСТЬ К ДЕЙСТВИЮ НИЗКИХ КОНЦЕНТРАЦИЙ КИСЛОТ И ЩЕЛОЧЕЙ		EN ISO 10545-13	VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ		CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME СООТВЕТСТВУЕТ
RESISTENZA AD ALTE CONCENTRAZIONI DI ACIDI E ALCALI RESISTANCE TO HIGH CONCENTRATIONS OF ACIDS AND ALKALI - BESTÄNDIGKEIT BEI HOHEN KONZENTRATIONEN VON SÄUREN UND LAUGEN - RESISTENCIA A ALTAS CONCENTRACIONES D'ACIDES ET ALCALIS - RESISTENCIA A ALTAS CONCENTRACIONES DE ÁCIDOS Y ALCALIS - СТОЙКОСТЬ К ДЕЙСТВИЮ ВЫСОКИХ КОНЦЕНТРАЦИЙ КИСЛОТ И ЩЕЛОЧЕЙ		EN ISO 10545-13	VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ		CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME СООТВЕТСТВУЕТ
RESISTENZA ALLE MACCHIE RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ		EN ISO 10545-14	CLASSE 3 MIN		CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME СООТВЕТСТВУЕТ
CESSIONE DI PIOMBO E CADMIO LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESION DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ		EN ISO 10545-15	VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ		< LIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT - UNMESSBARES WERT < LIMITE DEL INSTRUMENTO < НА ПРЕДЕЛЕ ОПРЕДЕЛИМОСТИ
SCIVOLOSITÀ SKID RESISTANCE - RUTSCHWERT GLISSANCE - ADHERENCIA СКОЛЬЗКОСТЬ	DM. 236/89 BCRA		> 0,40		> 0,40
	ANSI A 137.1		WET DCOF > 0,42		> 0,42
	DIN 51130		-		R9
	DIN 51097		-		A+B MOSAICO
					A+B+C